

MR-250MF MULTI-FUNCTION MACHINE ROOM STATION

FEATURES AND BENEFITS



MR-250MF

- Phone out (for tech support)
- Phone in (from outside the complex)
- Call any elevator connected to the LS-250 System
- Call any other machine room (MR-250MF)
- Call the Lobby Rescue Station
- Call the security offices (any Remote Station)
- Call any machine room from the lobby or security office
- No limit to the number of MR-250MF's (subject to the max 80 elevator phones + machine room phones)

Description: The Multi-Function Machine Room Phone offers full flexibility for an elevator installation.

Calling Out:

The MR-250MF enables calls into every elevator phone, the Lobby Rescue Station and the CACF and Security Desk if all are connected to the LS-250 Rescue Station System, as well as every other machine and control room equipped with an MR-250MF. Calls can also be made out of the building if a regular Telco line is connected to the Rescue Station.

Calling In:

Calls can be made into any MR-250MF (in the same way one calls into an elevator) from outside or from the Lobby Rescue Station, the CACF or a security desk






MR-250MF MULTI-FUNCTION MACHINE ROOM STATION

Specification:

Certification:	Handset is FCC / Industry Canada / CSA approved
Wiring:	CAT-5 communication cable between the machine room and LS-250 Rescue Station. Four conductors (two twisted pairs) are required, preferably shielded.
Connections:	Two pairs of screw connectors for the outside wiring.
Mounting:	Surface mount on wall of machine room or on side of controller. D-knockout on door for lock assembly if required.
Dimensions:	12.5" high x 8" wide x 3.5" deep.
Finish:	White powder coated 16 gauge steel. Black silk-screen lettering at the top of the unit saying "Elevator Telephone / Téléphone D'Ascenseur".
Weight:	6.6 lbs. (3 kg).

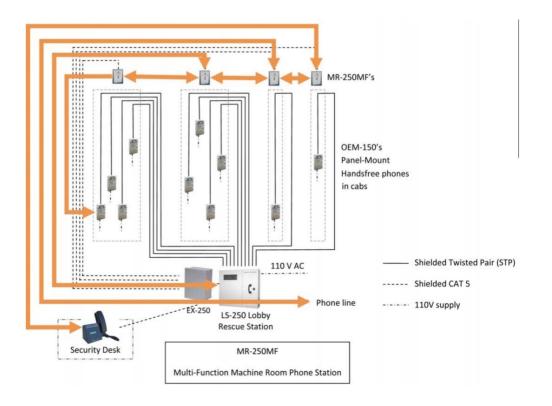

Supplied and serviced by:

information may change without notice



Member of the CIS Group of Companies Vancouver • Toronto • Montreal • Florida 1-877-731-1010 info@webbelectronicsinc.com www.webbelectronicsinc.com